




Technical data sheet

Drainage mesh grate

Hot-dip galvanised steel



Stainless steel

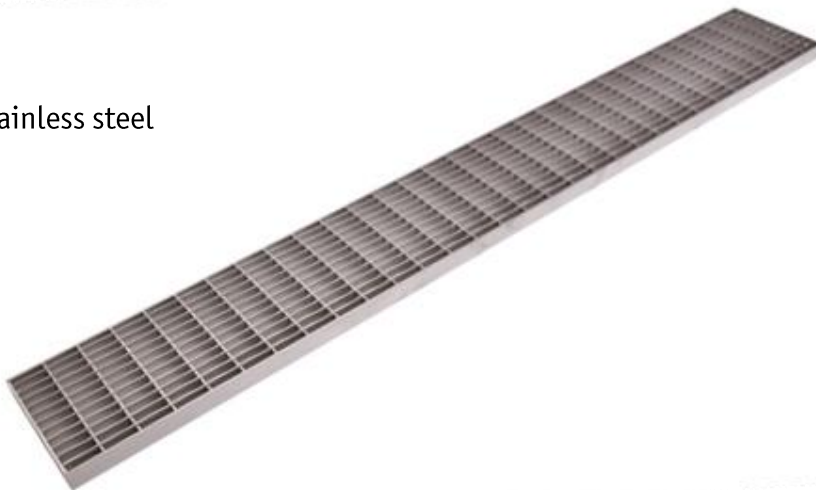

Manufacturer

Richard Brink GmbH & Co KG
Metal goods manufacture and distribution
Görlitzer Str. 1
33758 Schloß Holte-Stukenbrock
Phone: 0049 (0)5207 9504-0
Fax: 0049 (0)5207 9504-20



Product description

The drainage mesh grate is a box gutter cover grate.

The grate is made of stainless steel (V2A) or hot-dip galvanised steel.

Load class

The drainage mesh grate is designed in accordance with load class A15 (*walkable*).

On request, the grating is also available for heavy-duty use in accordance with load class D400 (*trafficable*).

Dimensions

<u>Inlet width</u>	<u>Height</u>	<u>Bar thickness</u>
100 mm	20 mm	30 x 10 mm
140 mm	20 mm	30 x 10 mm
160 mm	20 mm	30 x 10 mm
200 mm	20 mm	30 x 10 mm
250 mm	20 mm	30 x 10 mm
300 mm	20 mm	30 x 10 mm

The standard grating length is 1,000 mm in each case.

Special sizes are possible on customer request.

Inlet cross-sections of the grates

Inlet width 100 mm:	485 cm ² /m
Inlet width 140 mm:	809 cm ² /m
Inlet width 160 mm:	1.035 cm ² /m
Inlet width 200 mm:	1.295 cm ² /m
Inlet width 250 mm:	1.618 cm ² /m
Inlet width 300 mm:	2.105 cm ² /m



Slip resistance

The slip resistance of the grates corresponds to slip rating class R10.

Clear mesh size

The requirements of the German Social Accident Insurance (*DGVU-Information 208-007 Gratings - Selection and Operation*) are met. The clear mesh width must not exceed 10 mm to ensure safe access.

Materials used

We use only European material from Germany, Sweden, France and Italy for our grates.

Material specification

Stainless steel V2A (1.4301) and hot-dip galvanised steel.

Accessories

- Corners, factory prepared
- Stainless steel and hot-dip galvanised steel grate locks

Processing and care instructions

The grates can be cut to size. However, it must be ensured that the cutting medium (e.g. *saw blade, cutting disc, etc.*) is absolutely clean or does not contain any components of other metals, as otherwise corrosion may occur.

Dust particles of other metals or general cutting of components with flying sparks on the product are generally to be avoided.

If dust particles or soiling of other metals are present, these must be removed immediately with appropriate cleaning agents.



The grates must not be cleaned with strong acids or bases, but by hand with a broom or, if necessary, with a high-pressure cleaner.

Further installation & usage instructions as well as information on the material can be found at:

<https://www.richard-brink.de/en/downloads/brochures.html>