




Technical data sheet

Inspection and cistern attachment SRA

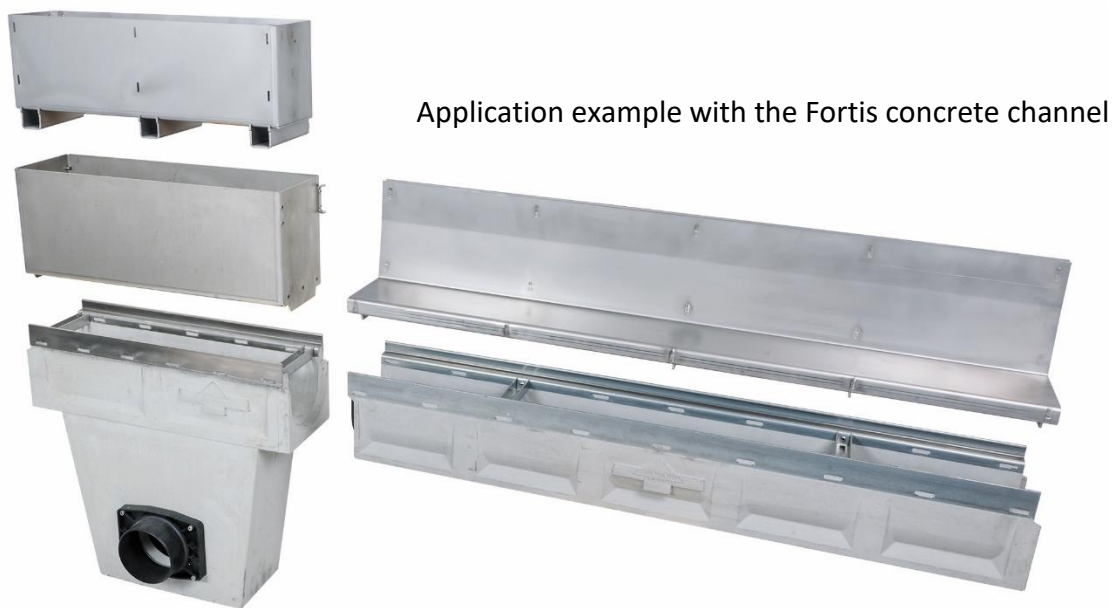

Manufacturer

Richard Brink GmbH & Co KG
Metal goods manufacture and distribution
Görlitzer Str. 1
33758 Schloß Holte-Stukenbrock
Phone: 0049 (0)5207 9504-0
Fax: 0049 (0)5207 9504-20

Status: 02/22



Product description

The inspection and cistern attachments are designed for cleaning and inspection. The inspection box has a floor or side drain. The cistern has no drain. The insertable closure boxes can be filled with paving stones and are easily removable with screw-on handles.

The boxes are mounted between two gutter elements.

Load class

The inspection and cistern attachment is designed in accordance with load class C250 or D400 (*trafficable*).

Dimensions

The inspection and cistern attachments are supplied in the following standard dimensions:

Length:	500 mm
Width:	145 mm (<i>for DN 100</i>), 195 mm (<i>for DN 150</i>)
for height:	182 mm (<i>following C250</i>), 185 mm (<i>following D400</i>)
for neck heights:	160 mm
Slot width:	10 mm

At the customer's request, all dimensions can be modified and supplied as custom-made products.

The inspection and cistern tops are available in hot-dip galvanised steel.

Important notes

When installing on a sealed concrete slab (*balconies, roof areas*), a protective film (*made of suitable material, e.g. EPDM film*) must be installed between the gutter and the waterproofing membrane at least to the width of the gutter in order to permanently protect the waterproofing.

When installing on a ballast base course, this must be sufficiently compacted to prevent subsequent settlement. The channel must rest on the base course.

Our installation instructions apply.

Materials used



We use only European material from Germany, Sweden, France and Italy for our revision and cistern tops.

Material specification

Hot dip galvanised sheet steel

Material thickness: 1.5 mm based on load class C250
3.0 mm based on load class D400

Processing and care instructions

Dust particles of other metals or general cutting of components with flying sparks on the product are generally to be avoided. If dust particles or soiling of other metals are present, these must be removed immediately with appropriate cleaning agents.

The boxes must not be cleaned with strong acids or bases, but by hand with a broom or, if necessary, with a high-pressure cleaner.

Further installation & usage instructions as well as information on the material can be found at:
<https://www.richard-brink.de/downloads/gesamtuebersicht.html>